

# PF20 type AIR VENT

## CHARACTERISTICS

The PF20 float air vent permits to eliminate air or non-condensable gases from a liquid pipework. It improves the fluid flow in the piping systems, avoids noises and corrosion, and protects the circulation pumps. With a cast iron construction and a 304 stainless steel internal mechanism, it is adapted to many applications. It has to be installed in a vertical position, above the volume that has to be drained.

## AVAILABLE ITEMS

Connection to pipework: 3/4" BSP  
Vent connection: 1/2" BSP

## EC 97/23 DIRECTIVE CATEGORY

Excluded (article 3, §3)

## LIMITS OF USE

Max. allowable pressure (PS)	10 bar
Max. allowable temperature (TS)	120 °C


## CONSTRUCTION

Item	Material
Body	Cast iron
Cap	Cast iron
Mechanism and float	Stainless steel 304
Gasket	EPDM

## DIMENSIONS (mm)

	A	B	D	H	Weight
PF20	1/2"	3/4"	126	135	3 kg

## FLOW RATE CHART

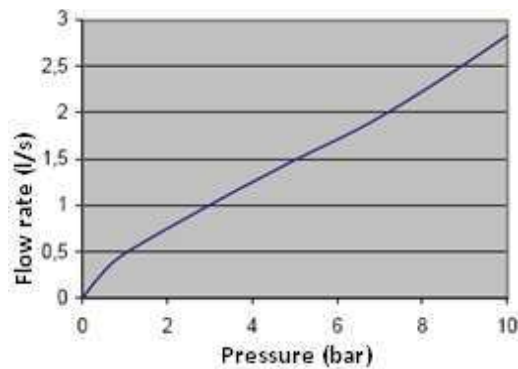

Technical data given for information purpose only. May be subject to alteration without prior notice

