

# NAW-2 STAINLESS STEEL SIGHT GLASS WITH DOME AND ROTOR

## FEATURES

The NAW-2 sight glass with dome and rotor is designed for the visual inspection of flow for fluids inside piping. Made of stainless steel with a PP rotor and a glass dome, it is especially designed for process fluids. The dome type provides particularly easy visibility. Horizontal mounting on installations. Unidirectional operation.




## AVAILABLE MODELS

NAW-2: G 1/4" to G 1"  
G thread connections

## LIMITS OF USE

Fluid WP:	16 bar
Fluid WT°:	-5°C / +80°C



## DIRECTIVES AND MANUFACTURING STANDARDS

OBJECT	Standard
Pressure Equipment Directive 97/23/EC	A3 § 3 non-submitted
Stainless steel grade	EN 10213-4
Threaded connection	ISO 228

## FLOW-RATE TABLE

DN	Minimum flow-rate (l/minute)	Maximum flow-rate (l/minute)	$\Delta P$ (v = 2 m/s) bar
G 1/4"	0.8	31	0.15
G 3/8"	0.9	41	0.18
G 1/2"	1.1	56	0.21
G 3/4"	1.4	95	0.2
G 1"	2.0	145	0.5


Information given as an indication only, and subject to possible modifications

	SECTORIEL S.A. 45 rue du Ruisseau 38290 SAINT QUENTIN-FALLAVIER – FRANCE Telephone: +33 4 74 94 90 70 – Fax: +33 4 74 94 13 95 <a href="http://www.sectoriel.fr">www.sectoriel.fr</a> / Email : <a href="mailto:sectoriel@sectoriel.fr">sectoriel@sectoriel.fr</a>	Pages	1/2
		Ref.	FT2241 ENG
		Rev.	01
		Date	07/2016

# NAW-2 STAINLESS STEEL SIGHT GLASS WITH DOME AND ROTOR



## DIMENSIONS (mm) AND WEIGHT (kg)

DN	A	B	C	Weight (kg)
G 1/4"	76	63	65	0.5
G 3/8"	76	63	65	0.7
G 1/2"	76	63	65	1.1
G 3/4"	89	63	83	1.2
G 1"	89	63	83	1.4

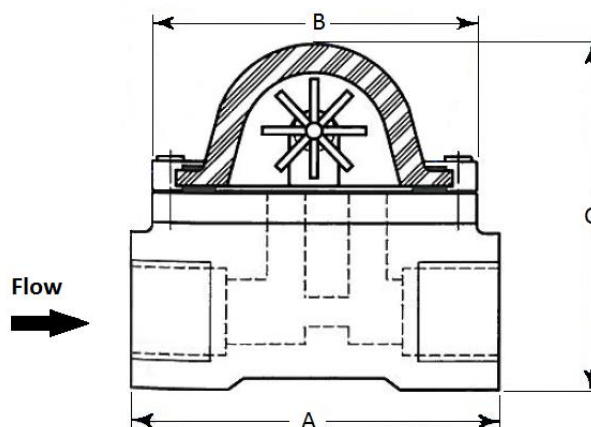

## CONSTRUCTION

No.	Name	Material
1	Body	1.4408 SS
2	Cover	1.4408 SS
3	Dome	Toughened glass
4	Gasket	FPM
5	Rotor guide	1.4408 SS
6	Rotor	PP + 10% glass fibre
7	Bolt	Stainless steel

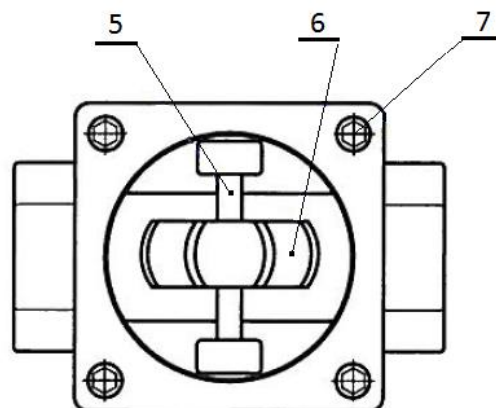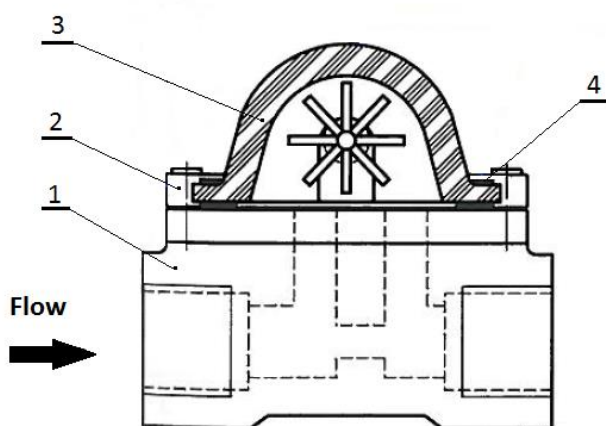

## ASSEMBLY AND SERVICING

Cut-off the piping upstream and downstream, depressurize, bleed and wait for it to cool down at ambient temperature before installation.

Loosen bolts, remove the cover, clean the glass dome and the internal parts.

Reassemble the parts in the reverse order.

Put the installation back in operation.

Information given as an indication only, and subject to possible modifications

	SECTORIEL S.A.	Pages	2/2
	45 rue du Ruisseau	Ref.	FT2241 ENG
	38290 SAINT QUENTIN-FALLAVIER – FRANCE	Rev.	01
	Telephone: +33 4 74 94 90 70 – Fax: +33 4 74 94 13 95 <a href="http://www.sectoriel.fr">www.sectoriel.fr</a> / Email : <a href="mailto:sectoriel@sectoriel.fr">sectoriel@sectoriel.fr</a>	Date	07/2016